



The E6 Series is a decorative and economical emergency lighting unit designed for easy installation. The E618 Fixture offers 11 watt remote capability.

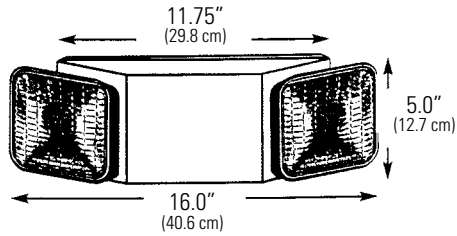

Complete Fixture consists of base unit with lamps.

How to Specify:

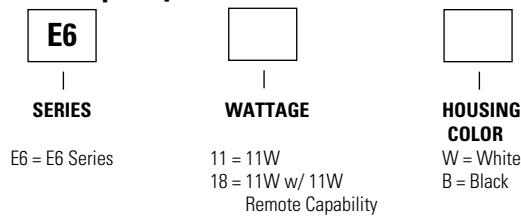

Features

1. **Illumination:** Illumination is accomplished with two adjustable lamps heads with 6 VDC, 5.4W lamps.
2. **Housing:** Constructed of impact resistant, UL 94 V-0, 5 VA white or black thermoplastic. Product is completely self-contained.
3. **Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
4. **Battery:** Maintenance free, sealed lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C).
5. **Input Power Requirements:** .045A (120 VAC), .020A (277 VAC)
6. **Warranty: Electronics:** 3 years; **Battery:** 1 year full, 4 years pro-rata

Code Compliance

UL 924 listed for damp locations.
National Electrical Code (NEC), NFPA70 and NFPA101 life safety codes; and OSHA safety code illumination standards.

Options

SD = Self-Diagnostics (available with white finish only)

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • C0308